



# Refrigerant Female Connection (AF)

The AF range offers six plugs designed for refrigerant inlets/outlets. Ergonomic handles and a handy grip tab ensure easy installation and removal, even with gloves. Available in multiple sizes, each plug protects the O-ring and prevents dust, liquids, and other contaminants for durable, reliable performance.

### Applications:

The AF range offers plugs for refrigerant inlets, ensuring a secure fit and protecting critical connections essential to NEV thermal management systems.

### Main features:

- 


Ideal solution for male refrigerant inlets/outlets
- 

Suitable for Automotive segment
- 

Sealing features for tight closure
- 

Made of Recycled LDPE
- 

Easy plug in & removal

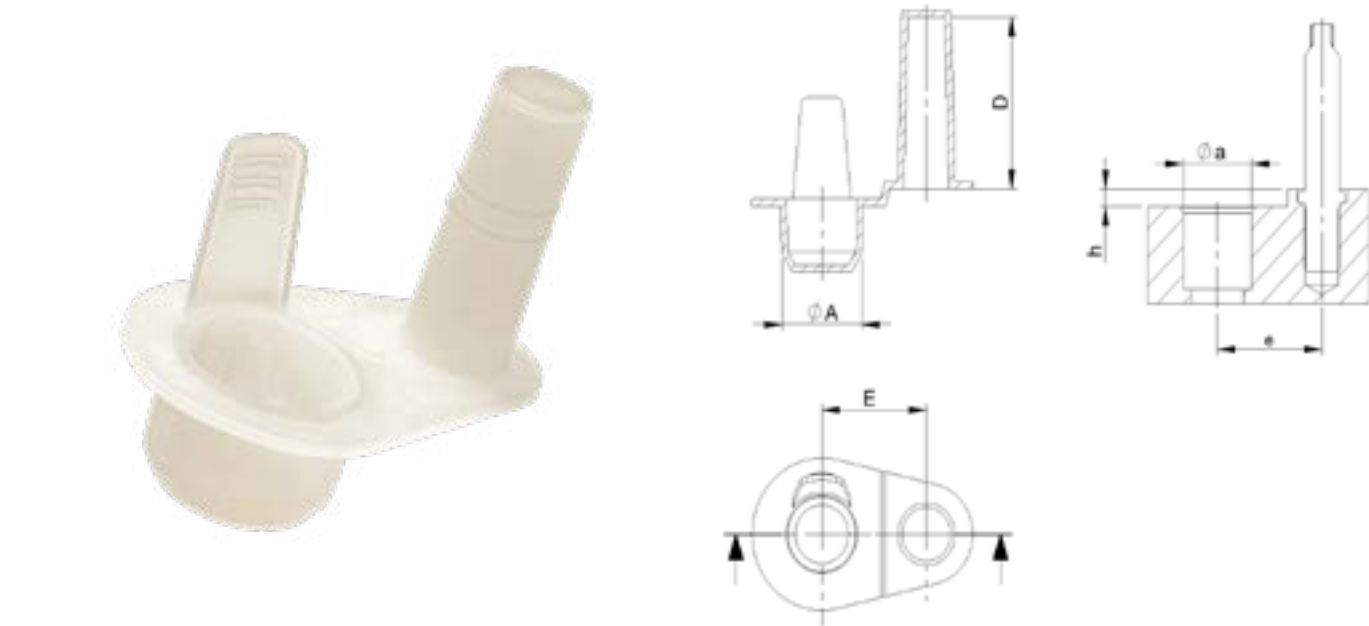

### Properties

Standard colour: Natural  
Standard material: Recycled LDPE

| DBI Ref.   | øA mm | D mm | E mm | QTY Bag/Box |
|------------|-------|------|------|-------------|
| AF0113A-AA | 11,4  | 25,8 | 18   | 3920/3920   |
| AF0120A-AA | 12    | 32   | 18   | 560/3360    |
| AF0146A-AA | 14,9  | 26   | 18   | 3920/3920   |
| AF0177A-AA | 18,2  | 26   | 19   | 3584/3584   |
| AF0182A-AA | 18,4  | 32   | 19   | 400/2800    |
| AF0209A-AA | 21,3  | 26   | 19   | 3360/3360   |

### Counterpart dimensions:

| DBI Ref.   | øa mm  | e mm  | h    | Description    |
|------------|--------|-------|------|----------------|
| AF0113A-AA | ø11,05 | 17/19 |      | STLA Module 6  |
| AF0120A-AA | ø11,79 | 18    | 2,76 | MB 1/2"        |
| AF0146A-AA | ø14,35 | 17/19 |      | STLA Module 8  |
| AF0177A-AA | ø17,45 | 19    |      | STLA Module 10 |
| AF0182A-AA | ø17,95 | 19    |      | MB NW13        |
| AF0209A-AA | ø20,65 | 19    |      | STLA Module 12 |