



Parallel Plugs Type (NC)

Universal closure that is mostly used as external protection. The reduced-weight design makes this plug cost-effective. It is recommended for fittings and connection ports.

Applications:

NC range is recommended for protection of fittings and connection ports in the automotive segment.

Main features:



Ideal solution for fittings & connection ports



Suitable for Automotive segment




Universal closure & reduced-weight design



Made of RECYCLE LDPE & HDPE



Easy mounting & dismounting

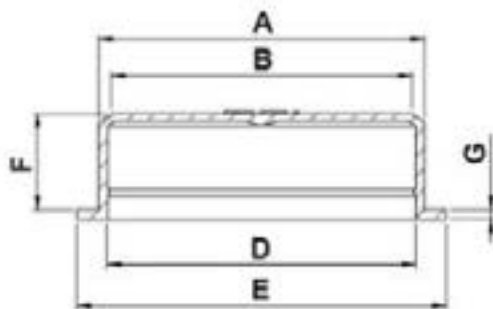

Properties

Standard colour: Red- Other colors may be available upon request
Standard material: RECYCLE LDPE

DBI Ref.	A mm	B mm	D mm	E mm	F mm	G mm	QTY Bag/Box
NC0130Z-AA	13,0	-	11,9	16,9	7,7	-	0/2500
NC0360A-AV	36,0	33,3	34,1	40,8	10,6	1,1	500/5500
NC0520A-AA	52,0	47,1	50,5	58,0	10,7	1,0	200/3000
NC0773A-AA	79,6	79,6	76,3	87,5	14,0	1,3	100/800
NC3120L-AA	311,8	307,2	307,6	326,2	38,3	1,2	15/105
NC3321L-AA	326,3	317,2	322,4	340,2	38,8	1,2	15/105
NC3540L-AA	351,9	347,8	347,2	366,5	38,5	1,2	15/105



Parallel Plugs Type (NC)

Breathable membranes

Universal closure that is mostly used as external protection. The reduced-weight design makes this plug cost-effective. It is recommended for fittings and connection ports.

Applications:

NC range is recommended for protection of fittings and connection ports in the automotive segment.

Main features:

- 

Ideal solution for fittings & connection ports
- 

Air circulation feature
- 

Universal closure & reduced-weight design
- 

Made of RECYCLE LDPE
- 

Easy mounting & dismantling

Properties

Standard colour: Red- Other colors may be available upon request
Standard material: RECYCLE LDPE

DBI Ref.	A mm	B mm	D mm	E mm	F mm	G mm	External diameter of pipe in mm	SDR-Standard Dimension Ratio	QTY Bag/Box
NC3120N-AA	311,8	307,2	307,6	326,2	38,3	1,2	355,0	17,0	15/105
NC3321N-AA	326,3	317,2	322,4	340,2	38,8	1,2	400	11,0	15/105
NC3540N-AA	351,9	347,8	347,2	366,5	38,5	1,2	400	17,0	15/105

