

Tight Metric Caps (AG)

Metric tight caps, do not require an additional washer or o-ring, avoiding the risk of losing, misplacing or omitting the washer during installation. In most cases the liquid is inside the application and they are tested under high pressure, which the threaded cap must resist.

Applications:

AG range is recommended for multiple applications such as hydraulic units: gear pumps, vane pumps, control valves, cylinders, commercial vehicle steering systems.

Main features:



Ideal solution for cylinders, gear & vane pumps



Suitable for Hydraulics segment




Sealing features for tight closure



Made of HDPE



Outside vertical ribs for easy plugging in & removal

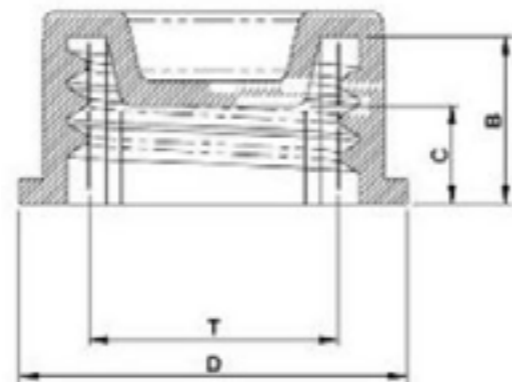

Properties

Standard colour: Red
Standard material: HDPE

DBI Ref.	Fits Thread T	B mm	C mm	D mm	E mm	E1 mm	QTY Bag/Box
AG1201A-EA	M12 x 1.5	6,8	4,0	15,7	7,4	8,7	1000/15000
AG1401A-EA	M14 x 1.5	6,9	4,0	18,0	9,4	10,7	500/11000
AG1601A-EA	M16 x 1.5	6,9	4,0	20,0	11,5	12,9	500/9000
AG1801A-EA	M18 x 1.5	7,8	4,8	22,0	13,4	14,9	250/10000