

Flex Plugs (GG)

The GG product range consists of ergonomically designed plugs with a handle, offering easy grip and removal, even with working gloves. It ensures excellent protection due to a small ventilation cut out on each of the flange. This ventilation cut out allows internal pressure to be released, which enables to keep the plug in the original position.

Applications:

GG range is recommended for protection of different types of pipes.

Main features:



Ideal solution for different types of pipes



Suitable for Pipes segment




Excellent protection thanks to the ventilation feature



Made of RECYCLE LDPE, & BIO LDPE



Easy mounting & dismounting

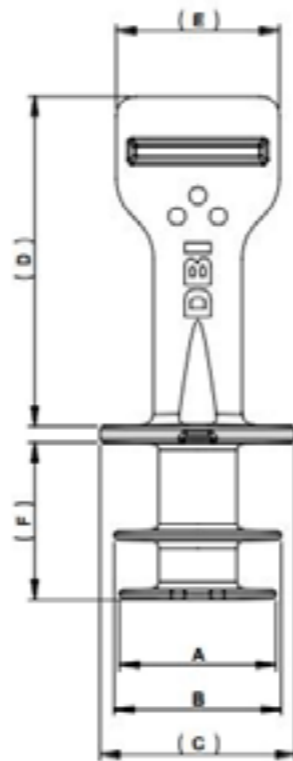

Properties

Standard colour: Red- Other colors may be available upon request
Standard material: RECYCLE LDPE

DBI Ref.	A mm	B mm	C mm	D mm	E mm	F mm	QTY Bag/Box
GG0120A-AA00A	12,0	12,8	15,0	25,4	12,5	12,1	1000/10000
GG0160A-AA00A	16,0	17,1	18,0	25,4	12,5	14,1	1000/8000
GG0200A-AA00A	20,0	21,3	25,0	25,4	12,5	16,2	1000/5000
GG0260A-AA00A	26,0	27,7	32,0	30,4	15,0	17,7	500/3500
GG0330A-AA00A	33,1	35,1	40,0	30,4	15,0	19,8	2000/20000
GG0420A-AA00A	42,0	44,6	50,0	35,4	17,5	22,9	1000/1000
GG0540A-AA00A	54,1	57,9	63,0	35,4	17,5	27,0	800/800

Standard colour: Green
Standard material: BIO LDPE

DBI Ref.	A mm	B mm	C mm	D mm	E mm	F mm	QTY Bag/Box
GG0120A-AB60A	12,0	12,8	15,0	25,4	12,5	12,1	1000/10000
GG0160A-AB60A	16,0	17,1	18,0	25,4	12,5	14,1	1000/8000
GG0200A-AB60A	20,0	21,3	25,0	25,4	12,5	16,2	1000/5000
GG0260A-AB60A	26,0	27,7	32,0	30,4	15,0	17,7	500/3500
GG0330A-AB60A	33,1	35,1	40,0	30,4	15,0	19,8	2000/20000
GG0420A-AB60A	42,0	44,6	50,0	35,4	17,5	22,9	1000/1000
GG0540A-AB60A	54,1	57,9	63,0	35,4	17,5	27,0	800/800