

Protectors with Flange (NE)

Type NE is a tapered plug that provides a closure where a large flange is required. A large flange helps in dismounting and protects a surface around the threaded and inspection holes in automotive applications. The product can be supplied with a vent hole if required. Some sizes are available in soft materials or high temperature-resistant versions.

Applications:

NE range is recommended for protection of surfaces around the threaded and inspection holes in automotive applications.

Main features:



Ideal solution for threaded & inspection holes



Suitable for Automotive segment




Wide flange



Made of RECYCLE LDPE



Easy mounting & dismounting

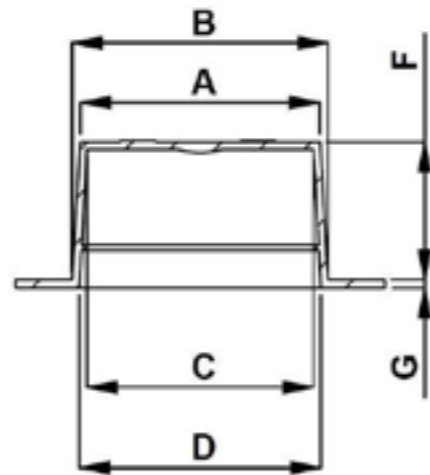

Properties

Standard colour: Red- Other colors may be available upon request

Standard material: RECYCLE LDPE

DBI Ref.	A mm	B mm	C mm	D mm	E mm	F mm	Venthole	QTY Bag/Box
NE0067A-AA	5,4	6,7	4,2	5,0	21,9	14,8		1000/20000
NE0078A-AA	6,8	7,9	5,3	6,3	17,0	9,0		1000/30000
NE0095A-AA	8,1	9,5	6,6	7,8	18,0	9,0		1000/25000
NE0115Z-AA	10,0	11,5	7,6	9,6	21,6	9,8		1000/15000
NE0128A-AA	11,4	12,5	10,2	11,1	21,8	9,9		1000/16000
NE0138A-AA	12,2	13,8	10,7	12,3	24,0	11,0		1000/12000
NE0147Z-AA	12,9	14,7	10,4	12,3	26,5	11,5		1000/11000
NE0161A-AA	14,3	16,1	12,7	14,5	25,7	11,8		1000/8000
NE0190A-AA	17,0	18,7	15,8	17,3	29,0	13,8		1000/6000
NE0202A-AA	17,8	20,2	16,3	18,8	30,0	14,0		500/11000
NE0202B-AA	17,8	20,2	16,3	18,8	30,0	14,0	x	500/11000
NE0224A-AA	20,2	22,4	18,9	20,9	33,0	15,0		500/9000
NE0229A-AA	20,3	22,9	18,9	20,9	40,0	15,0		500/6000
NE0257A-AA	24,0	25,7	22,7	24,2	37,0	13,8		500/7000
NE0272A-AA	24,9	27,2	23,7	25,7	40,0	13,8		500/2500
NE0306A-AA	27,9	30,6	25,6	28,9	42,2	13,9		250/2500
NE0314A-AA	29,6	31,4	28,2	30,0	44,0	15,8		250/3500
NE0334A-AA	31,0	33,4	29,5	31,9	48,0	17,3		250/3000
NE0395A-AA	37,0	39,9	35,4	38,6	54,0	16,5		250/2500
NE0410A-AA	38,5	41,0	36,2	39,7	60,0	18,3		250/2000
NE0419L-AA	39,3	42,2	38,2	40,8	56,0	19,7	x	250/2000
NE0447A-AA	41,7	44,7	39,2	42,8	67,9	16,3		100/1700
NE0451L-AA	41,5	45,1	39,6	43,2	70,0	19,6	x	100/1400
NE0480A-AA	45,6	48,0	43,5	45,9	62,4	18,7		100/1500
NE0510A-AA	48,0	53,0	46,0	49,6	95,0	14,6		100/1000
NE0516A-AA	49,3	51,6	47,3	50,2	64,0	18,7		100/700
NE0543A-AA	51,3	54,3	49,9	52,8	74,5	19,6		100/1000
NE0567A-AA	52,5	56,2	50,1	54,4	75,4	19,3		100/1100
NE0567B-AA	52,5	56,2	50,1	54,4	75,4	19,3	x	100/1100
NE0579A-AA	55,8	57,9	54,1	56,0	73,0	18,7		100/1000
NE0636A-AA	60,0	63,6	58,4	61,7	83,3	19,2		100/800
NE0730A-AA	66,8	72,8	64,9	70,9	100,0	20,6		50/600
NE0730D-AA	66,8	72,8	64,9	70,9	100,0	20,6	x	50/600
NE0808A-AA	77,9	80,3	76,1	78,7	100,3	20,4		0/500
NE1071P-AA	103,5	107,1	101,6	105,2	126,0	22,8	x	0/300